


A: 74mm  
 B: 95mm  
 C: 86mm  
 D: 60mm

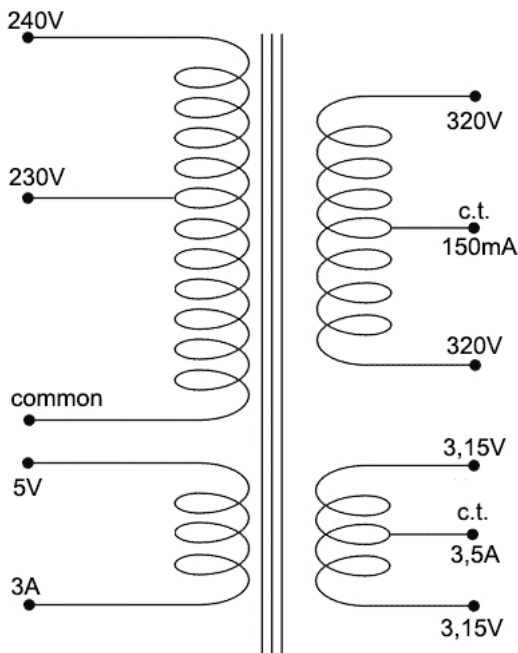

MAINS/50Hz			Anodic	
White	O	240V	320V	O Purple
Blue	O	230V	150 mA	O Gray
Brown	O	Common	320V	O Purple
Heater			Heater	
Orange	O	5V	3,15V	O Brown
Orange	O	3A	CT '3,5 A	O Black
			3,15V	O Brown

Power Trasformer mod.	Primary	Secondary	Replacement
TA2835-13	230V-240V	320V-0-320V, 3.15V-0-3.15V, 5V	Fender 5E3

Dimensions (HxWxD):	Weight (Kg):	Mount: vertical
---------------------	--------------	-----------------

Nucleo centrale lamierini (colonna x altezza pacco lamierini)	mm	28x35
Sezione nucleo centrale	cm2	8,82
Induzione magnetica	W/m2	1,3
f.e.m.i. in una spira	V	0,254
Rendimento del trasformatore	n	0,82
Caduta di tensione percentuale	V%	3,46
Frequenza di lavoro	Hz	50
Potenza assorbita dal primario	VA	80
Potenza disponibile al secondario	VA	70

NOTE: