CBB22
金属化聚丙烯膜直流电容器

CBB22 METALLIZED POLYPROPYLENE FILM DC CAPACITOR

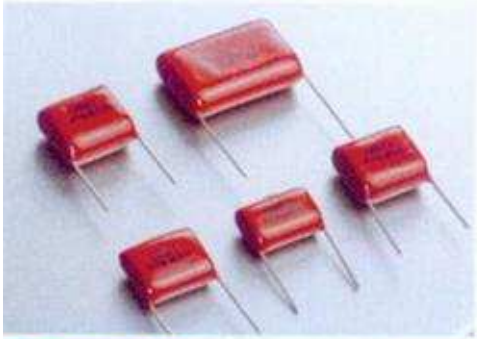

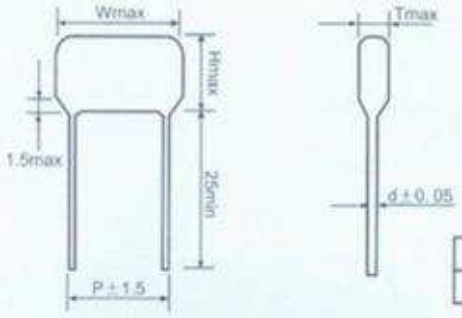

P<15	d=0.6mm
P≥15	d=0.8mm

特点与用途 Features

特点：采用金属化聚丙烯膜作介质和电极，用阻燃材料包封单向引出，具有电性能优良，可靠性好，损耗小和良好的自愈性能。

用途：该产品广泛使用于仪器、仪表、电视机及家用电器线路作直流脉动、脉冲和交流降压用。

Feature :Constructed with metalized polypropylene film as medium and electricode.Unidirectionally drawn out & sealed with flame-retardant dielcric . High reliability , low losses.Self-healing property.

Uses:Mainly used in electric cicuit of various electrical equipment ,can be used in DC impulsation as for AC voltage reduction.

技术要求 Specifications

引用标准	Rsference Standard	GB10191-88 SJ/T10353-93 (IE384-16)
使用温度	Operating Temperature	-40℃～+85℃
容量范围	Capacilanca Range	0.01～4.7μF
允许偏差	Capacitanca Tolerance	J:(±5%);K:(±10%)
额定电压	Rated Voltage	250V,400V,630V
耐电压	Withstand Voltage	1.6UR 2s(1.4 UR 5s)
损耗角正切	Dissipation Factor	≤0.1% (20℃ 1KHZ)
绝缘电阻	Insulation Resitance	C≤0.33μF ≥1000MΩ C>0.33μF ≥5000S

外形尺寸 Dimensions

R.V	250VDC				400VDC				630VDC			
Cap(μF)	W	T	H	P	W	T	H	P	W	T	H	P
0.01	10	5.1	8.1	7.5	13	5.7	8.1	10	13	5.7	8.1	10
0.015	10	5.1	8.1	7.5	13	4.5	7.9	10	13	4.5	7.9	10
0.022	10	5.7	8.5	7.5	13	9.5	14.9	10	13	9.5	14.9	10
0.033	10	5.7	8.5	7.5	13	5.2	13.1	10	13	5.2	13.1	10
					18	5.4	9.1	15	18	5.4	9.1	15
0.047	10	5.7	8.1	7.5	13	4.6	8.2	10	13	5.1	8.4	10
	13	6.3	10.1	10	18	6.5	13.1	15	18	5.7	11.4	15
0.068	10	5.7	8.1	7.5	13	5.7	8.1	10	18	8.8	15.7	15
0.1	10	5.7	8.1	7.5	13	6.3	10.1	10	18	6.4	10.1	15
	13	6.3	10.1	10	18	5.7	8.6	15				
0.15	13	7	11	10					18	8.2	13.1	15
0.22	13	6.5	10.3	10	18	5.8	9.6	15	18	8.3	13.8	15
	18	5.8	10.2	15								
0.33	18	7.7	12.1	15	18	6.7	11.2	15	18	8.4	13.2	15
					23	5.8	12.4	20				
0.47	18	8.1	12.8	15	18	8.1	12.8	15	18	8.8	15.7	15
	23	7.1	10.5	20	18	7.7	12.5	15	23	7.3	14.1	20
0.68	23	7.9	14.4	20	23	7.2	14.4	20	23	8.1	16.9	20
1.0	23	7.6	13.2	20	23	8.1	13.3	20	23	11.1	18.7	20
1.5	23	10.6	17.2	20	23	11.2	18.4	20	28	11.9	19.8	25
	26	8.6	14.2	22.5	23	8.7	19.1	20	28	13.2	24.5	25
2.2	28	10.2	17.5	25	28	11.8	19.1	26	28	13.2	24.5	25
3.3	28	13.2	19.5	25								
4.7												